



# 使用手冊


## eViewer

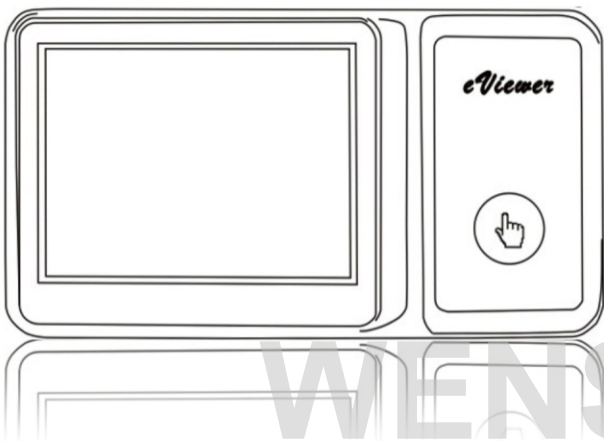

### 外觀及尺寸

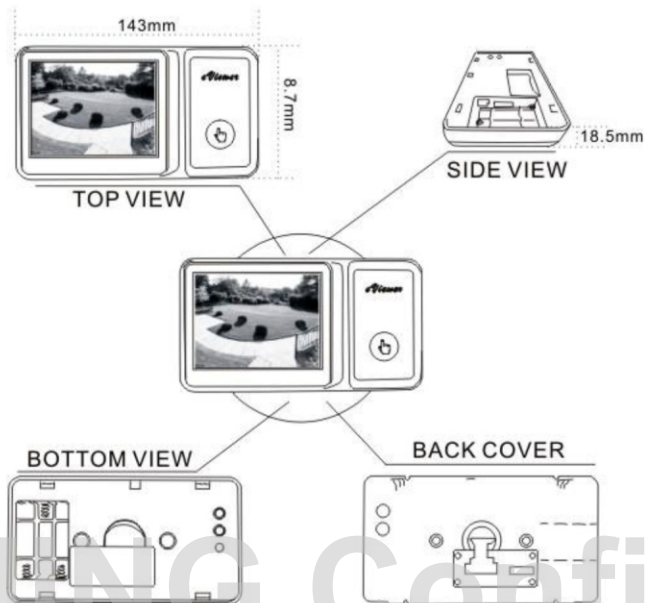

### 功能鍵說明

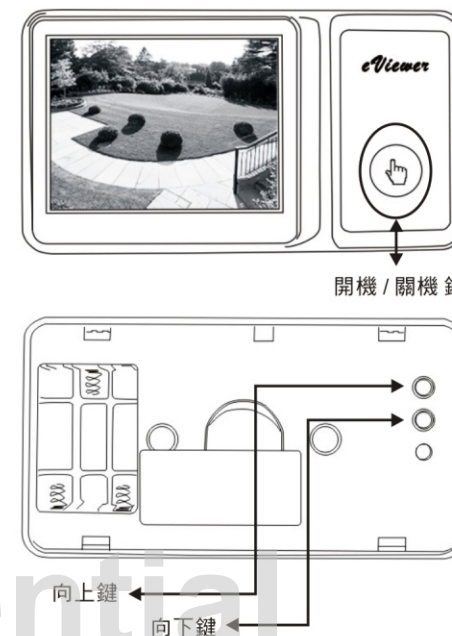

### 規格


- Display : 3.5" color TFT LCD (320 x 240 pixels)
- Sensor : 300K pixels
- Recording Format : AVI Motion JPEG(MPEG)
- Resolution : 320 x 240 @ 30fps maximum
- Language Support : English
- Memory : Support for a 4G Micro SD card
- Batteries : 3pcs AAA 1.5VDC Alkaline batteries
- Physical Dimensions : eViewer 143 x 87 x 18.5mm
- Connecting Pipe : Diameter 14mm;  
length 35~55mm
- Temperature : Operates between 0 ~ 40 Degree Celsius
- Humidity : Operates 15%~80%;  
Storage 15%~80%

### 操作說明

#### 開機

- 按住 鍵不放，系統即開機並顯示韌體版本後自動開始錄影及錄音。
- 錄影結束時會自動存到Micro SD卡內，存檔系統採用CDVR檔案系統，以日期為目錄、時間為檔名。
- 當Micro SD卡內容量低於100M時螢幕會顯示循環錄影的符號，低於50M時則依序刪除最早的檔案，依此方式循環錄影。
- 如未安裝Micro SD卡，開機後會出現“Insert SD Card”的提示字樣。
- 如未安裝鏡頭，開機則會出現“Please Check Sensor”的提示字樣後自動關機。


### 顯示畫面

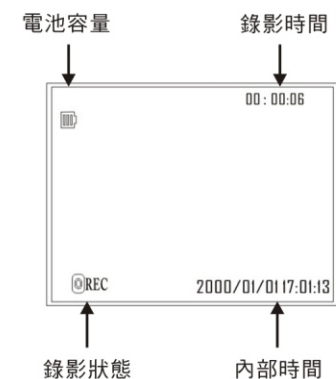

#### 關機


- 放開 鍵後，約3秒內系統即會自動儲存檔案並自動關機。

## 調整日期及時間


- 按住 Up 鍵不放，再按住  鍵，開機後會自動進入日期 / 時間調整選單內，此時即可放開開機 / 關機鍵。
- 按 Up 鍵、Down 鍵可上下調整，依序共有五個調整項目：年、月、日、時、分，3秒內如未按 Up 鍵、Down 鍵，則會進入下一個項目。
- 調整完畢後系統即自動關機。
- 在未安裝攝影鏡頭的情況下也可進入調整日期及時間的模式。

## 安裝步驟



- 拿起背板(Back Cover)插入門孔



- 鎖上螺絲固定背板(Back Cover)

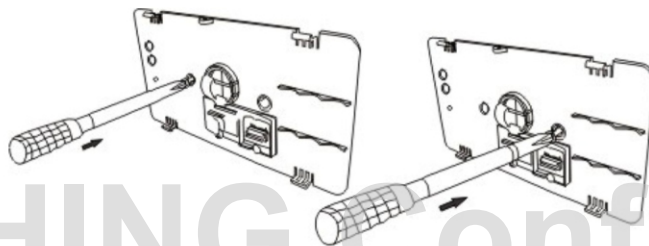

- 拿起前門孔蓋逆時鐘方向旋轉)

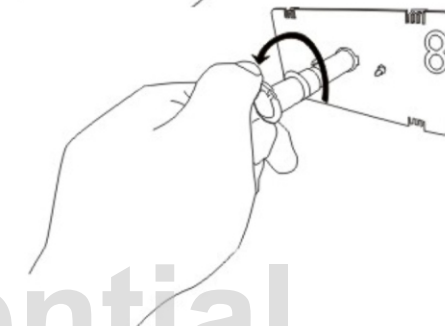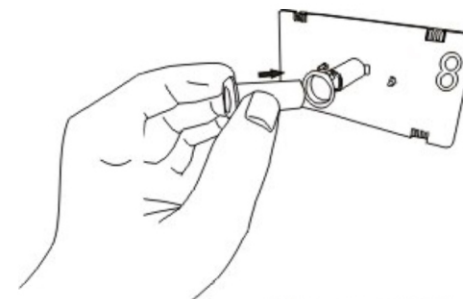


- 6 -


- 7 -

- 8 -

- 旋入鏡頭前端後將鏡頭輕輕拉出

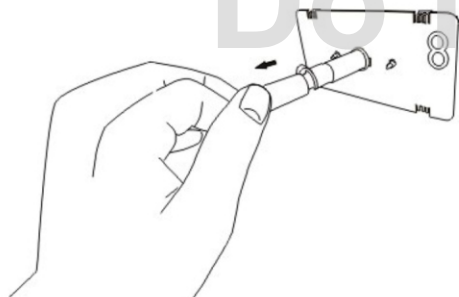


- 使用隨附的工具將門孔蓋鎖緊

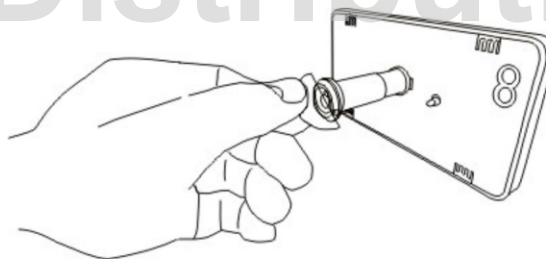


- 鎖上固定螺絲



- 繼續將門孔蓋以逆時鐘方向旋緊

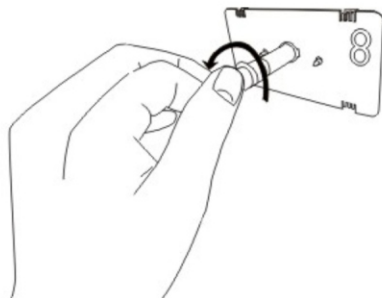

- 將主機裝上電池並且安裝在背板上

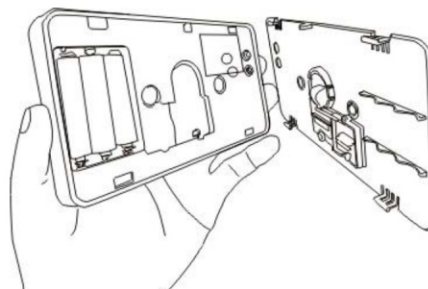

- 測試畫面是否正常



- 9 -

- 10 -

- 11 -